
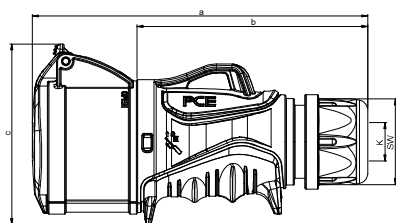


CEE Connectors

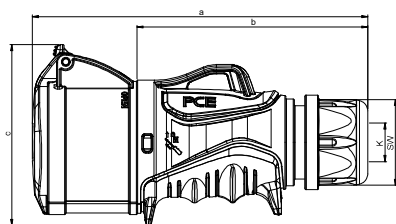

Connector IP44/54

GRIP

	16 Amp	32 Amp
Poles	5	5
a [mm]	168	194
b [mm]	117	134
c [mm]	93	105
K_cable Ø [mm]	8-16	11,5-22
Wire flexible [mm²]	1-2,5	2,5-6
Contact screws [Ncm]	100	110
SW [mm]	42	50
Weight [g]	211	313

- with screw terminals
- housing material: 2-components (PA6 / TPE)
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 2153-6v

IP44/54 splashproof

Connector IP44/54

GRIP TT

	16 Amp	32 Amp
Poles	5	5
a [mm]	168	194
b [mm]	117	134
c [mm]	93	105
K_cable Ø [mm]	8-16	11,5-22
Wire flexible [mm²]	1-2,5	2,5-6
SW [mm]	42	50
Weight [g]	216	315

- screwless connection technology
- housing material: 2-components (PA6 / TPE)
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 2153-6TTv

IP44/54 splashproof

STANDARD

with screw terminals



TURBO TERMINAL

screwless connection technology



TURBO clicks
TERMINAL

MIDNIGHT

also available in „black“ with screw terminals



Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50– 500V~	>50– 500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	5	10	2153-4	2153-9	2153-6			
32	5	10	2253-4	2253-9	2253-6			



2153-6

16	5	10	2153-4TT	2153-9TT	2153-6TT			
32	5	10	2253-4TT	2253-9TT	2253-6TT			



2253-6TT

MORE GRIP MORE „POWER“

The new CEE plugs and connectors with rubberized surfaces provide more safety and perfect grip for all applications

