


Functional principle:
Phase inverter

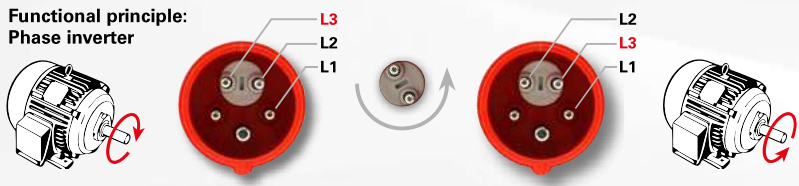

CEE Phase inverters

Phase inverter plug IP44

SHARK

	16 Amp		32 Amp	
Poles	4	5	4	5
a [mm]	128	134	150	155
b [mm]	92	98	104	109
c [mm]	53	61	63	70
K_cable Ø [mm]	6-15	8-16	11,5-20	11,5-22
Wire flexible class 5 or 6 [mm²]	1-2,5		2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]	42	42	50	50
Weight [g]	131	154	204	236

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP44 splashproof

Phase inverter plug IP44

SHARK TT

	16 Amp		32 Amp	
Poles		5		5
a [mm]		134		155
b [mm]		98		109
c [mm]		61		70
K_cable Ø [mm]		8-16		11,5-22
Wire flexible class 5 or 6 [mm²]	1-2,5		2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]		42		50
Weight [g]		156		237

- L1, N, PE = screwless connection terminals
- L2, L3 = screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP44 splashproof

Phase inverter plug IP67

SHARK

	16 Amp		32 Amp	
Poles	4	5	4	5
a [mm]	128	134	150	155
b [mm]	79	87	93	100
K_cable Ø [mm]	6-15	8-16	11,5-20	11,5-22
Wire flexible class 5 or 6 [mm²]	1-2,5		2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]	42	42	50	50
Weight [g]	153	183	245	280

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP66/67 watertight

Phase inverter plug IP44/54

GRIP

	16 Amp		32 Amp	
Poles		5		5
a [mm]		157		182
b [mm]		117		134
c [mm]		61		70
d [mm]		79		93
K_cable Ø [mm]		8-16		11,5-22
Wire flexible class 5 or 6 [mm²]	1-2,5		2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]		42		50
Weight [g]		180		273

- with screw terminals
- housing material: 2-components (PA6 / TPE)
- contacts: nickel-plated contacts

IP44/54 splashproof

Phase inverter plug IP44/54

GRIP TT

	16 Amp		32 Amp	
Poles		5		5
a [mm]		157		182
b [mm]		117		134
c [mm]		61		70
d [mm]		79		93
K_cable Ø [mm]		8-16		11,5-22
Wire flexible class 5 or 6 [mm²]	1-2,5		2,5-6	
Contact screws [Ncm]	100		110	
SW [mm]		42		50
Weight [g]		183		279

- L1, N, PE = screwless connection terminals
- L2, L3 = screw terminals
- housing material: 2-components (PA6 / TPE)
- contacts: nickel-plated contacts

IP44/54 splashproof

Amp.	Poles	pack. unit	230V~	400V~
			50/60Hz	50/60Hz
			4p=9h	4p+5p=6h
			Cat.No.	Cat.No.
16	4	10	7014-9	7014-6
16	5	10		7015-6
32	4	10	7024-9	7024-6
32	5	10		7025-6



16	5	10		7015-6TT
32	5	10		7025-6TT



16	4	10	70142-9	70142-6
16	5	10		70152-6
32	4	10	70242-9	70242-6
32	5	10		70252-6



16	5	10		70153-6
32	5	10		70253-6



16	5	10		70153-6TT
32	5	10		70253-6TT

