


CEE Phase inverters

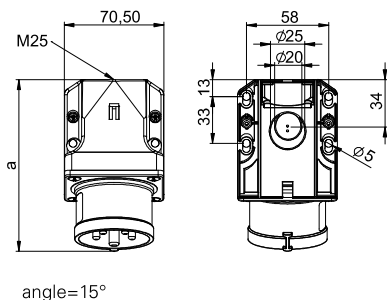


Phase inverter - Wall mounted plug IP44

	16 Amp	32 Amp
Poles	5	4 5
a [mm]	122	131 132
Height [mm]	79	85 85
M [mm]	25	25 25
Wire flexible class 5 or 6 [mm²]	1-2,5	2,5-6
Contact screws [Ncm]	100	110
Weight [g]	205	234 255

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- top and rear entry
- incl. threaded cable grommet

IP44 splashproof

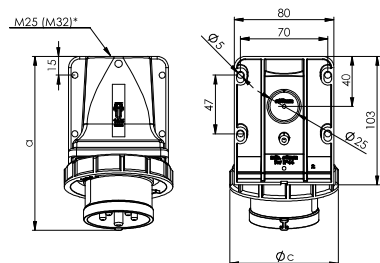


Phase inverter - Wall mounted plug IP67

	16 Amp	32 Amp
Poles	5	4 5
a [mm]	140	153 152
Height [mm]	100	104 102
c [mm]	71	93 100
M* [mm]	25	25 25
Wire flexible class 5 or 6 [mm²]	1-2,5	2,5-6
Contact screws [Ncm]	100	110
Weight [g]	241	276 307

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- top and rear entry

IP67 watertight

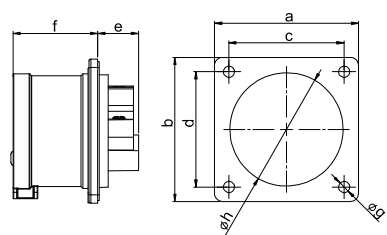


Phase inverter - Flanged plug straight IP44

	16 Amp	32 Amp
Poles	5	4 5
Flange a x b [mm]	70	70 70
Fixing center c x d [mm]	56	56 56
e [mm]	20	21 21
f [mm]	42	51 51
g [mm]	5,5	5,5 5,5
h [mm]	55	55 55
Wire flexible class 5 or 6 [mm²]	1-2,5	2,5-6
Contact screws [Ncm]	100	110
Weight [g]	118	146 167

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- According to EN 60309:
For correct use a locking device has to be provided (see page 10)

IP44 splashproof

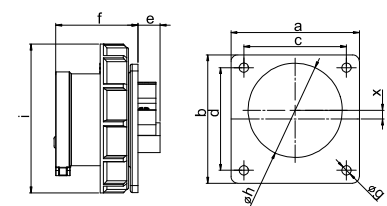

Phase inverter - Flanged plug straight IP67

	16 Amp	32 Amp
Poles	5	4 5
Flange a x b [mm]	75	75 75
Fixing center c x d [mm]	60	60 60
e [mm]	13	15 14
f [mm]	48	58 58
g [mm]	5,5	5,5 5,5
h [mm]	55	55 55
i [mm]	87	93 100
x [mm]	5	4,5 0
Wire flexible class 5 or 6 [mm²]	1-2,5	2,5-6
Contact screws [Ncm]	100	110
Weight [g]	150	185 215

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- According to EN 60309:
For correct use a locking device has to be provided (see page 10)
- for 16A 5p and 32 5p the plug is placed off centered for keeping the standards

IP67 watertight

			230V~	400V~
			50/60Hz	50/60Hz
			4p=9h	4p+5p=6h
Amp.	Poles	pack. unit	Cat.No.	Cat.No.


16	5	10
16	5	10
32	4	10
32	4	10
32	5	10
32	5	10

7724-9	7724-6
7724-9d	7724-6d
	7725-6
	7725-6d

with cap

with cap

with cap

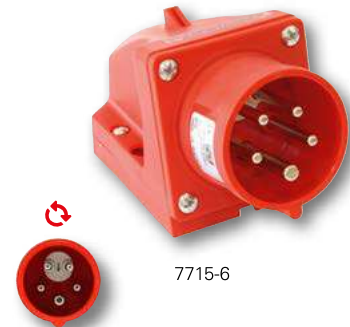

7715-6

16	5	5
32	4	5
32	5	5


	77152-6k
77242-9k	77242-6k
	77252-6k



77152-6k

flange 70 x 70 - fixing center 56 x 56		
16	5	10
32	4	10
32	5	10

	8615-6
8624-9	8624-6
	8625-6



8624-6

flange 75 x 75 - fixing center 60 x 60		
16	5	10
32	4	10
32	5	10

	86152-6
86242-9	86242-6
	86252-6



86152-6

