

Socket outlet Austrian/German system

• STANDARD •	
16 Amp	
Poles	2P + E
Flange a [mm]	50
Fixing center b [mm]	37,5
c [mm]	9
d [mm]	29
e [mm]	4,3
f [mm]	43
Wire flexible [mm ²]	1 - 2x2,5
Wire solid [mm ²]	1 - 2x2,5
Contact screws [Ncm]	80
Weight [g]	34

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP20




Socket outlet Austrian/German system

• STANDARD •	
16 Amp	
Poles	2P + E
Flange a [mm]	50
Fixing center b [mm]	38
c [mm]	62
d [mm]	25
e [mm]	18
f [mm]	24
g [mm]	43
h [mm]	4,2
Wire flexible [mm ²]	1 - 2x2,5
Wire solid [mm ²]	1 - 2x2,5
Contact screws [Ncm]	80
Weight [g]	45

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP54 splashproof

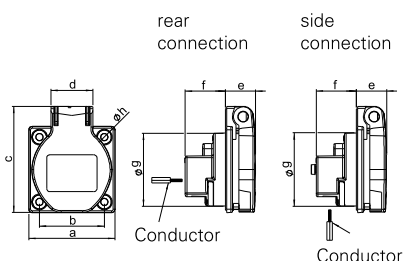


Socket outlet Austrian/German system

• STANDARD •	
16 Amp	
Poles	2P + E
Flange a [mm]	50
Fixing center b [mm]	38
c [mm]	62
d [mm]	25
e [mm]	17
f [mm]	26
g [mm]	43
h [mm]	4,5
Wire flexible [mm ²]	1 - 2x2,5
Wire solid [mm ²]	1 - 2x2,5
Weight [g]	46

- screwless connection technology
- housing material: PA6
- contacts: nickel-plated contacts
- rear connection

IP54 splashproof




Socket outlet Austrian/German system

	• STANDARD •	• SPECIAL •	
	16 Amp	16 Amp	
Poles	2P + E	2P + E	2P + E
Flange a [mm]	50	70	75
Fixing center b [mm]	38	56	60
c [mm]	62	72	75
d [mm]	25	25	25
e [mm]	17	17	21
f [mm]	26	26	22
g [mm]	43	43	43
h [mm]	4,5	5,5	5,5
Wire flexible [mm ²]	1 - 2x2,5		
Wire solid [mm ²]	1 - 2x2,5		
Contact screws [Ncm]	80		
Weight [g]	46	51	55

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP54 splashproof

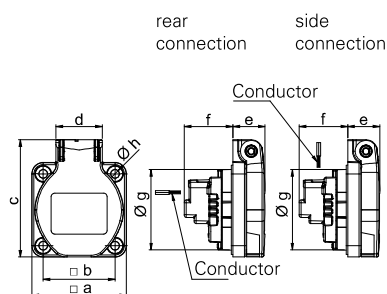

Amp. Poles pack. unit Abbreviations/Types

Cat.No.

Cat.No.

Cat.No.

16 3 100

P-NOVA
PLUS+

„sc“ side connection, with shutter

10584-0wsc



10584-0wsc

16 3 100
16 3 100
16 3 100
16 3 100

P-NOVA
PLUS+

rear connection (standard)

„s“ side connection

„c“ rear connection, with shutter

„sc“ side connection, with shutter

1050-0b
1050-0bs
1050-0bc
1050-0bsc



1050-0b

16 3 100
16 3 100

S-NOVA®

rear connection (standard)

„c“ rear connection, with shutter

109-0b
109-0bc

TURBO
TERMINAL



109-0b

16 3 100
16 3 100
16 3 100
16 3 100

S-NOVA®

rear connection (standard)

„s“ side connection

„c“ rear connection, with shutter

„sc“ side connection, with shutter

105-0b
105-0bs
105-0bc
105-0bsc

105-7b
105-7bs
105-7bc
105-7bsc

105-8b
105-8bs
105-8bc
105-8bsc



105-0b
Flange = 50x50



105-8b
Flange = 75x75

Special versions are available on request.

