


# CEE Wall sockets

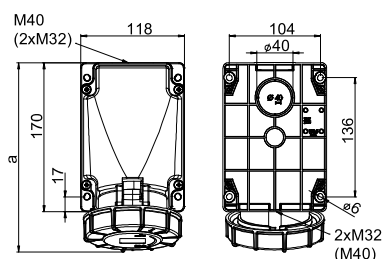

angle=15°

## Wall socket IP66/67


## POWER TWIST

|                      | 63 Amp |     |     |
|----------------------|--------|-----|-----|
| Poles                | 3      | 4   | 5   |
| a [mm]               | 213    | 213 | 213 |
| Height [mm]          | 173    | 173 | 173 |
| Wire flexible [mm²]  | 6-16   |     |     |
| Wire solid [mm²]     | 6-25   |     |     |
| Contact screws [Ncm] | 200    |     |     |
| Weight [g]           | 820    | 869 | 923 |

- contact frame with screws
- housing material: PC/ABS
- contacts: brass with lamellar contact CuBe
  - to order with pilot contact add a „5“ e.g. 1335-6 (see page 8)
  - to order with pilot contact system (PCS) add a „6“ e.g. 1336-6 (see page 8)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- cable-glands see accessories page 51

**IP66/67** watertight

**IP44** on request

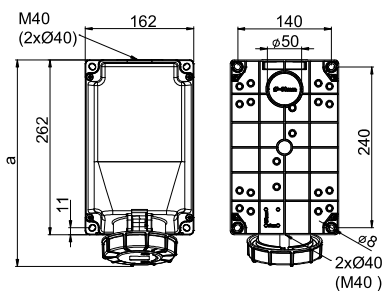

angle=15°

## Wall socket IP66/67


## POWER TWIST

|                      | 63 Amp |      |      |
|----------------------|--------|------|------|
| Poles                | 3      | 4    | 5    |
| a [mm]               | 306    | 306  | 306  |
| Height [mm]          | 195    | 195  | 195  |
| Wire flexible [mm²]  | 6-16   |      |      |
| Wire solid [mm²]     | 6-25   |      |      |
| Contact screws [Ncm] | 200    |      |      |
| Weight [g]           | 1360   | 1409 | 1463 |

- contact frame with screws
- housing material: PC/ABS
- contacts: brass with lamellar contact CuBe
  - to order with pilot contact add a „5“ e.g. 13575-6 (see page 8)
  - to order with pilot contact system (PCS) please add a „6“ e.g. 13576-6 (see page 8)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- cable-glands see accessories page 51

**IP66/67** watertight

**IP44** on request

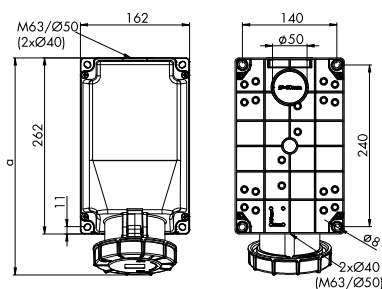

angle=15°

## Wall socket

## IP66/67

## POWER TWIST

|                      | 125 Amp |      |      |
|----------------------|---------|------|------|
| Poles                | 3       | 4    | 5    |
| a [mm]               | 322     | 322  | 322  |
| Height [mm]          | 205     | 205  | 205  |
| Wire flexible [mm²]  | 16-50   |      |      |
| Wire solid [mm²]     | 16-50   |      |      |
| Contact screws [Ncm] | 450     |      |      |
| Weight [g]           | 1745    | 1752 | 1852 |

- contact frame with hexag socket screws
- housing material: PC/ABS
- contacts: brass with lamellar contact CuBe
  - to order with pilot contact add a „5“ e.g. 1455-6 (see page 8)
  - to order with pilot contact system (PCS) add a „6“ e.g. 1456-6 (see page 8)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- cable-glands see accessories page 51

**IP66/67** watertight


### Advantages:

Housing can be rotated by 180° – the position of the cable entry can be chosen!


| Amp.                                         | Poles | pack.<br>unit | 110V~         | 230V~                        | 400V~                        | 500V~         | >50–<br>500V~    | >50–<br>500V~   |
|----------------------------------------------|-------|---------------|---------------|------------------------------|------------------------------|---------------|------------------|-----------------|
|                                              |       |               | 50/60Hz<br>4h | 50/60Hz<br>3p=6h<br>4p+5p=9h | 50/60Hz<br>3p=9h<br>4p+5p=6h | 50/60Hz<br>7h | 100-300Hz<br>10h | 301-500Hz<br>2h |
|                                              |       |               | Cat.No.       | Cat.No.                      | Cat.No.                      | Cat.No.       | Cat.No.          | Cat.No.         |
|                                              |       |               |               |                              |                              |               |                  |                 |
| Basic unit HxWxD = 170x118x173; 1xM40; 2xM32 |       |               |               |                              |                              |               |                  |                 |
| 63                                           | 3     | 1             | 133-4         | 133-6                        | 133-9                        | 133-7         | 133-10           | 133-2           |
| 63                                           | 4     | 1             | 134-4         | 134-9                        | 134-6                        | 134-7         | 134-10           | 134-2           |
| 63                                           | 5     | 1             | 135-4         | 135-9                        | 135-6                        | 135-7         | 135-10           | 135-2           |



|                                              |   |   |        |               |               |        |         |        |
|----------------------------------------------|---|---|--------|---------------|---------------|--------|---------|--------|
| Basic unit HxWxD = 262x162x195; 1xM40; 2xØ40 |   |   |        |               |               |        |         |        |
| 63                                           | 3 | 1 | 1337-4 | <b>1337-6</b> | 1337-9        | 1337-7 | 1337-10 | 1337-2 |
| 63                                           | 4 | 1 | 1347-4 | 1347-9        | <b>1347-6</b> | 1347-7 | 1347-10 | 1347-2 |
| 63                                           | 5 | 1 | 1357-4 | 1357-9        | <b>1357-6</b> | 1357-7 | 1357-10 | 1357-2 |



|                                              |   |   |       |              |              |       |        |       |
|----------------------------------------------|---|---|-------|--------------|--------------|-------|--------|-------|
| Basic unit HxWxD = 262x162x205; 1xØ50; 2xØ40 |   |   |       |              |              |       |        |       |
| 125                                          | 3 | 1 | 143-4 | <b>143-6</b> | 143-9        | 143-7 | 143-10 | 143-2 |
| Basic unit HxWxD = 262x162x205; 1xM63; 2xØ40 |   |   |       |              |              |       |        |       |
| 125                                          | 4 | 1 | 144-4 | 144-9        | <b>144-6</b> | 144-7 | 144-10 | 144-2 |
| 125                                          | 5 | 1 | 145-4 | 145-9        | <b>145-6</b> | 145-7 | 145-10 | 145-2 |



Accessories (cable glands) see page 51

