


CEE Flanged plugs

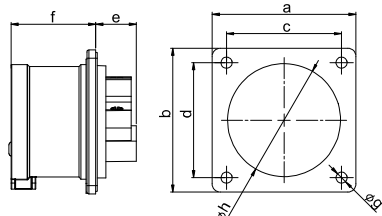


Flanged plug straight IP44

	16 Amp		32 Amp	
Poles		5		5
Flange a x b [mm]		75		75
Fixing center c x d [mm]		60		60
e [mm]		20		21
f [mm]		42		51
g [mm]		5,5		5,5
h [mm]		55		55
Wire flexible [mm²]	1-2,5		2,5-6	
Wire solid [mm²]	1-4		2,5-10	
Contact screws [Ncm]	100		110	
Weight [g]		121		170

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 615-6f7v
- According to EN 60309: For correct use a locking device has to be provided (see page 10)

IP44 splashproof

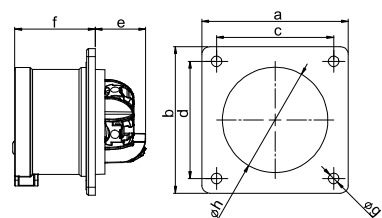


Flanged plug straight IP44 TT

	16 Amp		32 Amp	
Poles		5		5
Flange a x b [mm]		75		75
Fixing center c x d [mm]		60		60
e [mm]		26		29
f [mm]		42		51
g [mm]		5,5		5,5
h [mm]		55		55
Wire flexible [mm²]	1-2,5		2,5-6	
Wire solid [mm²]	1-4		2,5-10	
Weight [g]		126		178

- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 615-6TTf7v
- According to EN 60309: For correct use a locking device has to be provided (see page 10)

IP44 splashproof

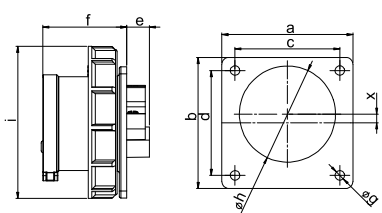


Flanged plug straight IP67

	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
Flange a x b [mm]	75	75	75	75	75	75
Fixing center c x d [mm]	60	60	60	60	60	60
e [mm]	15	14	13	14	15	14
f [mm]	48	48	48	58	58	58
g [mm]	5,5	5,5	5,5	5,5	5,5	5,5
h [mm]	43	44	55	55	55	55
i [mm]	71	79	87	93	93	100
x [mm]	11,3	6	5	4,5	4,5	0
Wire flexible [mm²]	1-2,5			2,5-6		
Wire solid [mm²]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	109	131	150	167	188	214

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 6152-6v
- According to EN 60309: For correct use a locking device has to be provided (see page 10)
- for 16A 3p till 32A 4p the plug is placed off centered for keeping the standards

IP67 watertight

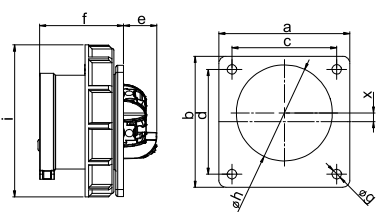

Flanged plug straight IP67 TT

	16 Amp		32 Amp	
Poles	3	5	4	5
Flange a x b [mm]	75	75	75	75
Fixing center c x d [mm]	60	60	60	60
e [mm]	20	20	21	21
f [mm]	48	48	58	58
g [mm]	5,5	5,5	5,5	5,5
h [mm]	43	55	55	55
i [mm]	71	87	93	100
x [mm]	11,3	5	4,5	0
Wire flexible [mm²]	1-2,5		2,5-6	
Wire solid [mm²]	1-4		2,5-10	
Weight [g]	111	154	194	222

- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 6152-6ttv
- According to EN 60309: For correct use a locking device has to be provided (see page 10)
- for 16A 3p, 16A 5p and 32A 4p the plug is placed off centered for keeping the standards

IP67 watertight

			110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
Amp.	Poles	pack. unit	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.

flange 75 x 75 - fixing center 60 x 60								
16	5	10	615-4f7	615-9f7	615-6f7	615-7f7	615-10f7	615-2f7
32	5	10	625-4f7	625-9f7	625-6f7	625-7f7	625-10f7	625-2f7



615-6f7

flange 75 x 75 - fixing center 60 x 60					
16	5	10	615-4TTf7	615-9TTf7	615-6TTf7
32	5	10	625-4TTf7	625-9TTf7	625-6TTf7

TURBO click
TERMINAL



615-6TTf7

flange 75 x 75 - fixing center 60 x 60								
16	3	10	6132-4	6132-6	6132-9	6132-7	6132-10	6132-2
16	4	10	6142-4	6142-9	6142-6	6142-7	6142-10	6142-2
16	5	10	6152-4	6152-9	6152-6	6152-7	6152-10	6152-2
32	3	10	6232-4	6232-6	6232-9	6232-7	6232-10	6232-2
32	4	10	6242-4	6242-9	6242-6	6242-7	6242-10	6242-2
32	5	10	6252-4	6252-9	6252-6	6252-7	6252-10	6252-2



6152-6

flange 75 x 75 - fixing center 60 x 60					
16	3	10	6132-4TT	6132-6TT	6132-9TT
16	5	10	6152-4TT	6152-9TT	6152-6TT
32	4	10	6242-4TT	6242-9TT	6242-6TT
32	5	10	6252-4TT	6252-9TT	6252-6TT

TURBO click
TERMINAL



6252-6TT

