


# CEE Wall mounted plugs

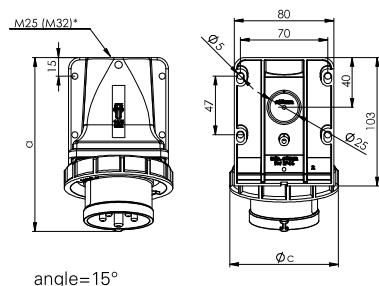

angle=15°


## Wall mounted plug IP67

|                             | 16 Amp |     |     | 32 Amp |     |     |
|-----------------------------|--------|-----|-----|--------|-----|-----|
| <b>Poles</b>                | 3      | 4   | 5   | 4      | 5   |     |
| <b>a [mm]</b>               | 136    | 138 | 140 | 150    | 153 | 152 |
| <b>Height [mm]</b>          | 99     | 94  | 100 | 104    | 104 | 102 |
| <b>c [mm]</b>               | 71     | 79  | 87  | 93     | 93  | 102 |
| <b>M* [mm]</b>              | 25     | 25  | 25  | 25     | 25  | 25  |
| <b>Wire flexible [mm²]</b>  | 1-2,5  |     |     | 2,5-6  |     |     |
| <b>Wire solid [mm²]</b>     | 1-4    |     |     | 2,5-10 |     |     |
| <b>Contact screws [Ncm]</b> | 100    |     |     | 110    |     |     |
| <b>Weight [g]</b>           | 200    | 223 | 242 | 260    | 280 | 306 |

\*M32 optional on request available

- with screw terminals
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a „**v**“ e.g. 5152-6**v**
- top or rear entry
- incl. threaded bung

**IP67** watertight

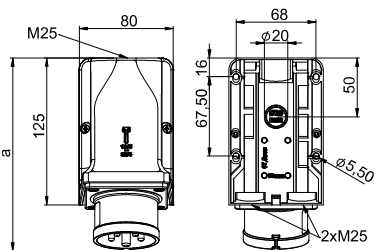


angle=15°

## Wall mounted plug IP44

|                             | 16 Amp |      |      | 32 Amp |      |      |
|-----------------------------|--------|------|------|--------|------|------|
| <b>Poles</b>                | 3      | 4    | 5    | 3      | 4    | 5    |
| <b>a [mm]</b>               | 163    | 163  | 164  | 173    | 173  | 174  |
| <b>Height [mm]</b>          | 109    | 109  | 112  | 115    | 115  | 118  |
| <b>M [mm]</b>               | 3x25   | 3x25 | 3x25 | 3x25   | 3x25 | 3x25 |
| <b>Wire flexible [mm²]</b>  | 1-2,5  |      |      | 2,5-6  |      |      |
| <b>Wire solid [mm²]</b>     | 1-4    |      |      | 2,5-10 |      |      |
| <b>Contact screws [Ncm]</b> | 100    |      |      | 110    |      |      |
| <b>Weight [g]</b>           | 263    | 278  | 295  | 302    | 322  | 341  |

- with screw terminals
- for wiring through
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 9515-6**v**
- top, 2x bottom or rear entry
- incl. threaded cable grommet

**IP44** splashproof

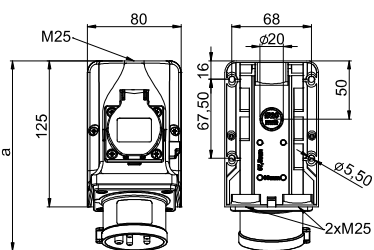


angle=15°

## Wall mounted plug - COMBO IP44

|                             | 16 Amp |      |      | 32 Amp |  |      |
|-----------------------------|--------|------|------|--------|--|------|
| Poles                       | 3      | 4    | 5    | 3      |  | 5    |
| a [mm]                      | 162    | 162  | 163  | 172    |  | 173  |
| Height [mm]                 | 117    | 117  | 117  | 117    |  | 118  |
| M [mm]                      | 3x25   | 3x25 | 3x25 | 3x25   |  | 3x25 |
| Wire flexible [mm²]         | 1-2,5  |      |      | 2,5-6  |  |      |
| Wire solid [mm²]            | 1-4    |      |      | 2,5-10 |  |      |
| Contact screws CEE<br>[Ncm] | 100    |      |      | 110    |  |      |
| Screw terminals [Ncm]       | 120    |      |      |        |  |      |
| Weight [g]                  | 367    | 382  | 399  | 422    |  | 463  |

- with screw terminals
- wall mounted plug with integrated safety socket acc. Austr./Germ. system
- connecting terminals up to 10mm²
- **ready wired**
- for plug 32A the safety socket is protected by fuse (10A slow)
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 95215-6**v**
- top, 2x bottom or rear entry
- incl. threaded cable grommet
- special design with Belg./French socket outlet or non wired version are available on request

**IP44** splashproof

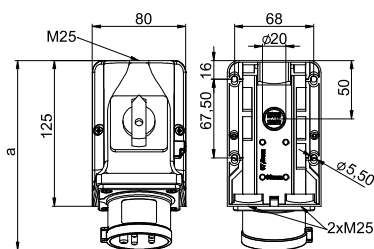

angle=15°

## Wall mounted plug with switch IP44

|                            | 16 Amp | 32 Amp |
|----------------------------|--------|--------|
| <b>Poles</b>               | 5      | 5      |
| <b>a [mm]</b>              | 163    | 173    |
| <b>Height [mm]</b>         | 128    | 128    |
| <b>M [mm]</b>              | 3x25   | 3x25   |
| <b>Wire flexible [mm²]</b> | 1-2,5  | 2,5-6  |
| <b>Wire solid [mm²]</b>    | 1-4    | 2,5-10 |
| <b>Weight [g]</b>          | 474    | 522    |

- with screw terminals
- wall mounting plug with integrated ON/OFF switch AC22A
- **prewired**
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 75615-6**v**
- top, 2x bottom or rear entry
- incl. threaded cable grommet

**IP44** splashproof

| Amp. | Poles | pack.<br>unit | 110V~         | 230V~                        | 400V~                        | 500V~         | >50-<br>500V~    | >50-<br>500V~   |
|------|-------|---------------|---------------|------------------------------|------------------------------|---------------|------------------|-----------------|
|      |       |               | 50/60Hz<br>4h | 50/60Hz<br>3p=6h<br>4p+5p=9h | 50/60Hz<br>3p=9h<br>4p+5p=6h | 50/60Hz<br>7h | 100-300Hz<br>10h | 301-500Hz<br>2h |
|      |       |               | Cat.No.       | Cat.No.                      | Cat.No.                      | Cat.No.       | Cat.No.          | Cat.No.         |
| 16   | 3     | 5             | 5132-4k       | 5132-6k                      | 5132-9k                      | 5132-7k       | 5132-10k         | 5132-2k         |
| 16   | 4     | 5             | 5142-4k       | 5142-9k                      | 5142-6k                      | 5142-7k       | 5142-10k         | 5142-2k         |
| 16   | 5     | 5             | 5152-4k       | 5152-9k                      | 5152-6k                      | 5152-7k       | 5152-10k         | 5152-2k         |
| 32   | 3     | 5             | 5232-4k       | 5232-6k                      | 5232-9k                      | 5232-7k       | 5232-10k         | 5232-2k         |
| 32   | 4     | 5             | 5242-4k       | 5242-9k                      | 5242-6k                      | 5242-7k       | 5242-10k         | 5242-2k         |
| 32   | 5     | 5             | 5252-4k       | 5252-9k                      | 5252-6k                      | 5252-7k       | 5252-10k         | 5252-2k         |



5252-6k

|    |   |   |        |               |               |        |         |        |
|----|---|---|--------|---------------|---------------|--------|---------|--------|
| 16 | 3 | 5 | 9513-4 | <b>9513-6</b> | 9513-9        | 9513-7 | 9513-10 | 9513-2 |
| 16 | 4 | 5 | 9514-4 | 9514-9        | <b>9514-6</b> | 9514-7 | 9514-10 | 9514-2 |
| 16 | 5 | 5 | 9515-4 | 9515-9        | <b>9515-6</b> | 9515-7 | 9515-10 | 9515-2 |
| 32 | 3 | 5 | 9523-4 | <b>9523-6</b> | 9523-9        | 9523-7 | 9523-10 | 9523-2 |
| 32 | 4 | 5 | 9524-4 | 9524-9        | <b>9524-6</b> | 9524-7 | 9524-10 | 9524-2 |
| 32 | 5 | 5 | 9525-4 | 9525-9        | <b>9525-6</b> | 9525-7 | 9525-10 | 9525-2 |



9515-6

|    |   |   |                |                |
|----|---|---|----------------|----------------|
| 16 | 3 | 5 | <b>95213-6</b> | <b>95215-6</b> |
| 16 | 4 | 5 |                |                |
| 16 | 5 | 5 |                |                |
| 32 | 3 | 5 | <b>95223-6</b> | <b>95225-6</b> |
| 32 | 5 | 5 |                |                |



95225-6



95215-6

|    |   |   |  |                |
|----|---|---|--|----------------|
| 16 | 5 | 5 |  | <b>75615-6</b> |
| 32 | 5 | 5 |  |                |



75615-6